


DORH-Series Oil Receiver: Compact housing for operating pressure up to 130 bar. 	Product Features: <ul style="list-style-type: none"> • Oil Receiver with fastening • CE marked acc. PED 97/23EC • Powder Painted for excellent corrosion resistance
---	---


Technical Data

CE acc. PED	2014/68/EU	Media compatibility:	CO ₂ , Mineral-, Synthetic- and POE lubricants
Applied Standards:	EN 378/-1/-2, EN 14276-1, EN 1593, EN 1779	Material:	Housing: Steel, powder painted Safety Valve Conn: ½" NPT
Pressure Range:	max. operating pressure PS: 130 bar Test pressure PT: 186 bar	Temperature Range:	-10°C to 120°C


Models

Type	P/N	Oil Volume (ltr.)	Inlet/Outlet	A	B	C	D	E	DGRL Gruppe
DORH-1/4"-3	18109	3		450	320	116	210	114	II
DORH-1/4"-5	18110	5		710	576				
DORH-1/4"-7	18111	7	1/4" NPT	960	826				
DORH-1/4"-10	18112	10		670	521	137		168	III
DORH-1/4"-12	18113	12		790	641				

DORH

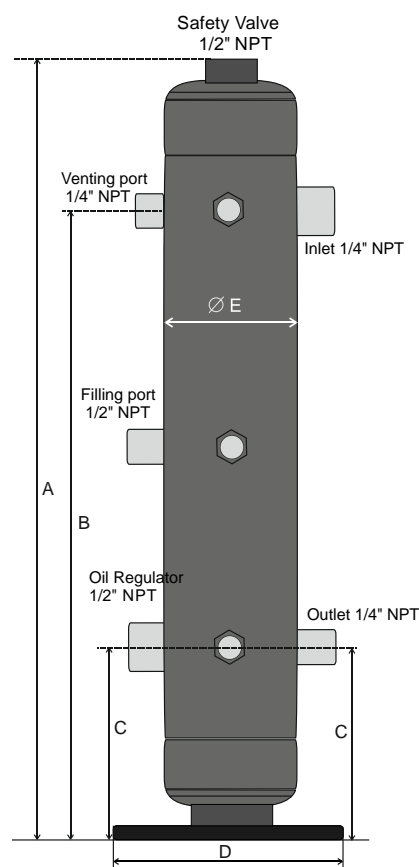

Cycle Diagram with DEKA Products

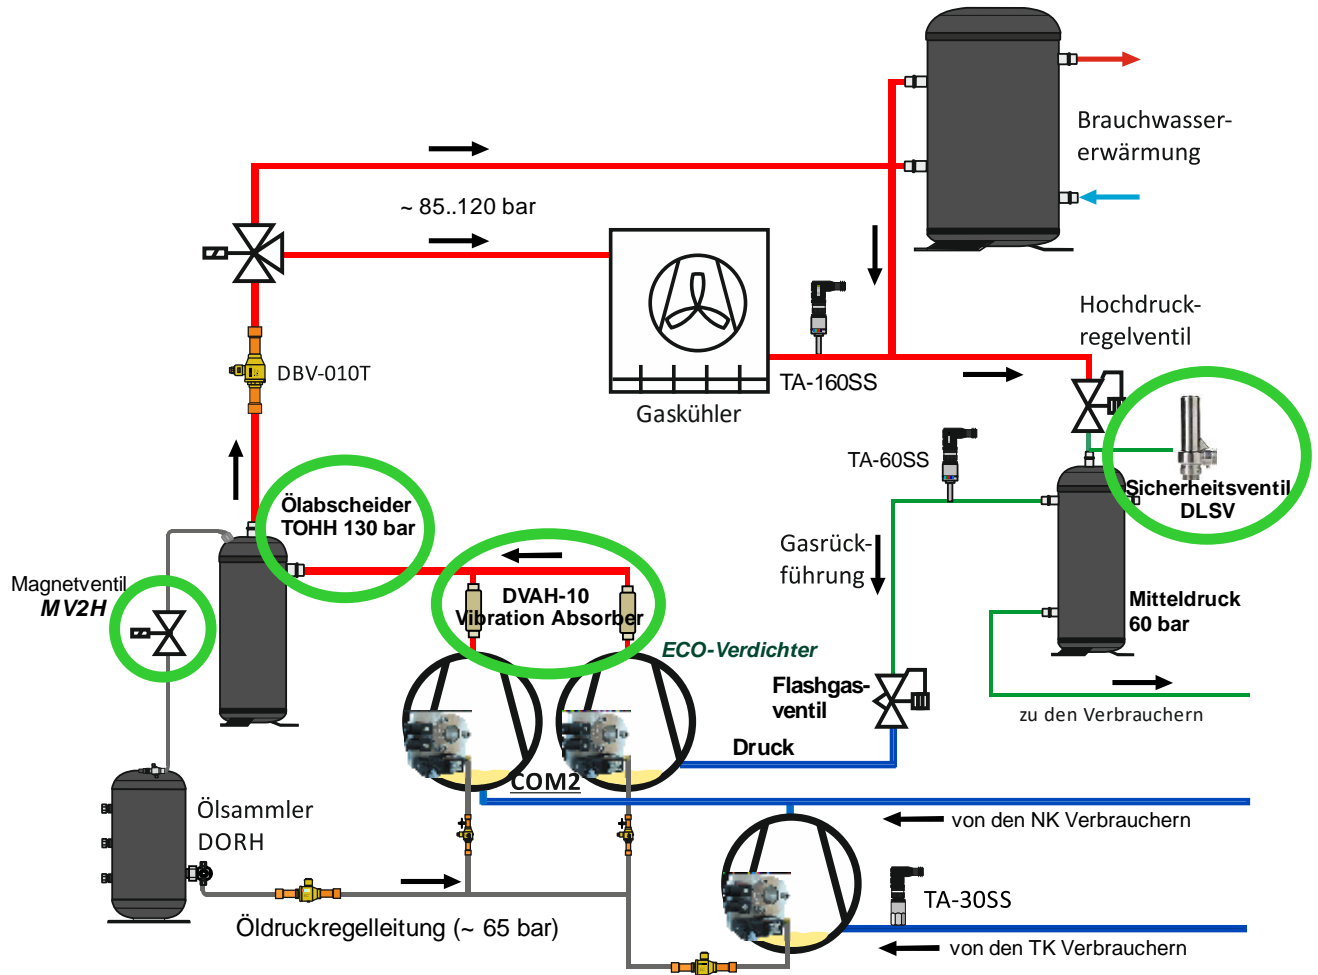

DEKA Controls will not accept responsibility for possible errors in Technical literature and other printed material. DEKA Controls reserves the right to change his products without notice. This applies also to products already on order provided that such changes can be made without sequential changes being necessary in specifications already agreed.