



Y-Filter for operating pressure of 120 bar



Compact Design, suitable for 120 bar operating pressure.	Product features: <ul style="list-style-type: none"> • Fine Filter (Meshsize 0,18mm) for the Oil line and similar applications • with fastening holes • Leak free, tested with Helium Mass Spectrometer
---	---

Technical Data

CE acc. PED	2014/68/EU (Art. 4.3)	Compatible with Media	FKW, HFKW, HFO, CO2 Mineral-, Synthetik- und POE Oil
Pressure Range:	max. oper. Pressure: PS: 120 bar Test Pressure PT: 172 bar	Material:	Housing: Brass Filter: Stainless Steel Seat gasket: PTFE
Standards:	EN 378/-1/-2, EN 12284, EN 12420, EN 12165	Temperature Range:	-40°C ... 150°C

Technical Details

Type	P/N	Connection ODF	A (mm)	B (mm)	Wrench size	D (mm)	Weight (g)
Y-Filter 6mm	16606	6mm	83	6	33mm	42	690
Y-Filter 10mm	16605	10mm	83	10	33mm	42	690

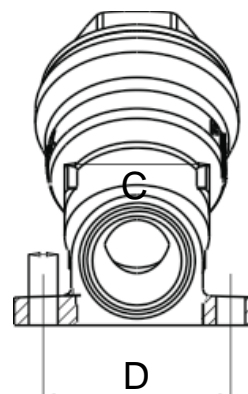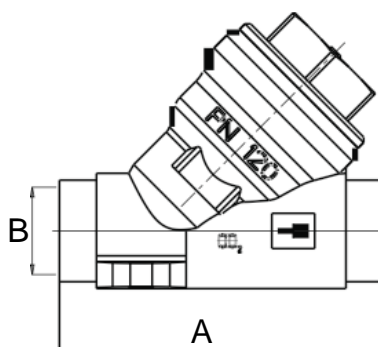

DEKA Controls will not accept responsibility for possible errors in Technical literature and other printed material. DEKA Controls reserves the right to change his products without notice. This applies also to products already on order provided that such changes can be made without sub sequential changes being necessary in specifications already agreed.